

DMC 多美時燃氣設備有限公司

DMC GAS EQUIPMENT LIMITED

Address: Unit 11, 11/F, Tower One, Ever Gain Plaza, 88 Container Port Road, Kwai Chung, NT, Hong Kong
 Website: www.dmc-gas.com Email: dmcsaleshk@dmc-gas.com.hk
 Tel: +852 2851 2121 Fax: +852 2851 2129

New! L6579 Low Liquid Emission Double Back Check Filler Valve Only 2.14 cubic centimeters discharge, a 68% improvement with no change in filling rates!

Application

Designed for fast filling and low emissions at disconnect; the L6579 Series can be used as a filler valve on ASME domestic containers and larger DOT cylinders.

Features

- Low emission- 2.14 cubic centimeters at disconnect (2.14cc versus 6.85cc)
- Double back check provides added system protection
- Both checks are spring actuated for quick precise closure when flow in the valve stops or reverses.
- Shear groove below ACME threads is designed to protect the valve in the event of a pull-away.




Materials

Upper Body.....Brass
 Lower Body.....Brass
 Springs.....Stainless Steel
 Seat Disc.....Synthetic Rubber
 Cap.....Resilient Molded Plastic

New L6579


2.14cc Emissions

Reduced area above the seat and unique seat disc design

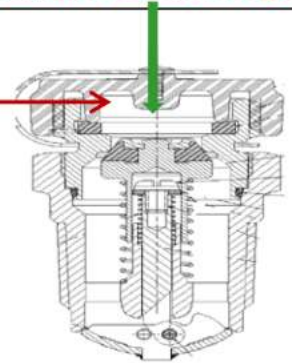

Current 6579

6.85cc Emissions

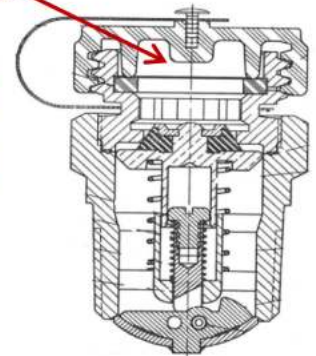

Ordering Information

Part	Number	Acme Size	Tank Conn.	Wrench Flats	Propane	Liquid	Capacity at	Various	Differential
					5 PSIG	10 PSIG	25 PSIG	50 PSIG	75 PSIG
L6579	L6579C	1-3/4"	1-1/4"	1-7/8"	78 (gpm)	110 (gpm)	174 (gpm)	246 (gpm)	301(gpm)