

### 高压用橡胶软管

#### High pressure hoses



本产品是液化石油气用高压橡胶软管。有气相用和液相用两种。当LPG的容器更换时，由于液相管内藏止回阀，因此拧下手柄时，止回阀作动切断通路，防止胶管内的液体流出。

This high-pressure rubber hose for LP gas is designed to connect a LP gas bottle valve and a high pressure-collecting pipe (root valve).

#### IHS6气相用高性能高压橡胶软管

IHS-6 High-Performance High-Pressure Hose



#### LIHS液相用高性能高压橡胶软管(附液相止回阀)

LIH High Pressure Hose with Valve to prevent the release of fluid



#### 规格 Specifications

型号 Model	长度(公称) Nominal hose length	连接 Connection
IHS-6-6H·S·T	φ6× 600mm	R <sup>1</sup> / <sub>4</sub> ×POL 阳 (H·S) R <sup>1</sup> / <sub>4</sub> ×POL male (H·S)
IHS-6-10H·S·T	φ6×1000mm	
IH-6-12H·S	φ6×1200mm	
IH-6-15H·S	φ6×1500mm	
LIHS-6-6T	φ6× 600mm	R <sup>1</sup> / <sub>4</sub> ×POL 阳 R <sup>1</sup> / <sub>4</sub> ×POL male
LIHS-6-10T	φ6×1000mm	
LIHS-6-15T	φ6×1500mm	

除上表型号以外, 还备有中国规格连接型号。欢迎与本公司及代理店垂询。

#### TIH6拉力式喷出防止型高压橡胶软管

TIH-6 High pressure hose with tension-triggered stop valve for preventing gas leaks


地震等发生时, 胶管异常拉力时安全装置作动, 防止喷出。  
If abnormal tension is applied to the high pressure hose due to an earthquake etc., then the stop valve is activated to prevent gas leakage.




#### 规格 Specifications

型号 Model	长度(公称) Length of hose	连接 Connection	漏气防止阀启动受力强度 Activating load of stop valve
TIH-6-6H·S·T	φ6× 650mm	R <sup>1</sup> / <sub>4</sub> ×POL 阳 (H·S) R <sup>1</sup> / <sub>4</sub> ×POL male (H·S)	在进口压力0.1MPa, 20~150(N) 在~下动作 (约2~15 (kgf))
TIH-6-10H·S·T	φ6×1050mm		Activated at 20~150 (N) when inner pressure is 0.1Mpa


#### 安全可靠的四层构造 4 Layer Construction for Safety

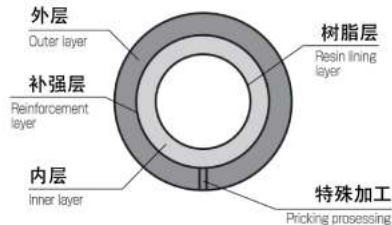

#### 与容器连接时

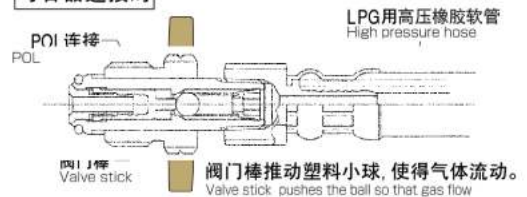


#### 关闭时

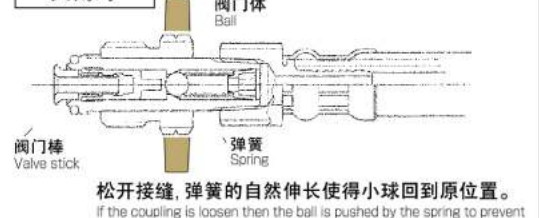

#### 通常时

胶管的短接头抵住球体(阀)燃气通路被打开。  
Valve stick pushes the ball so that gas flow

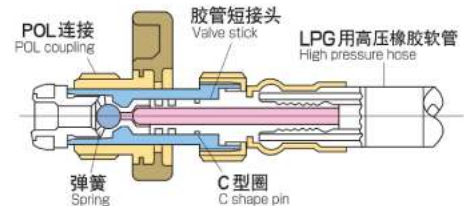

#### 阀体关闭时

受异常压力的作用, 球体的低压被释放。燃气通路被切断喷出防止阀(安全机构)作动后, 前头部分所显示红色。  
If abnormal tension is applied to the hose, then the stop valve is activated to prevent gas leakage.

